

Weekly Programmable Timer

Product Features

Versatility: Weekly programmable timer with eight timing settings per day and fifteen weekly combinations. Can also be used as a 24-hour timer.



Reliability: Crystal oscillator ensures a high degree of accuracy and an internal lithium battery prevents up to a year of power outages.

Standardization: UL and C-UL recognized, and CE Certified





Dimensions

Surface Mount



Surface mount using PM-68 bracket



Timing Chart

	SUN	MON	TUE	WED	THU	FRI	SAT
1		⊙					
2			⊙				
3				⊙			
4					⊙		
5						⊙	
6							⊙
7	⊙						
8		⊙	⊙	⊙	⊙	⊙	
9		⊙	⊙	⊙	⊙	⊙	⊙
10	⊙						⊙
11	⊙	⊙	⊙	⊙	⊙	⊙	⊙
12		⊙	⊙	⊙			
13					⊙	⊙	⊙
14		⊙		⊙		⊙	
15			⊙		⊙		⊙

Specifications


Operating Voltage (VAC/VDC): 12~48
100~240
Allowable Range: 85~110% of rated voltage
Contact Rating: 250VAC 7A (resistive load)
Life: 5,000,000 operations mechanical
100,000 operations electrical

Ambient Temperature: -10~50°C
Ambient Humidity: 65% RH Max
Frequency: 50/60Hz
Operation Indicator: ON: Green, OFF: Red
Weight: 150g
Power Consumption: ~3.3VA


Connection

Time Switch and Load Power Supply are Separate

Surface Mount

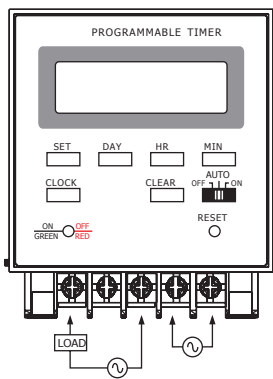


Flush Mount

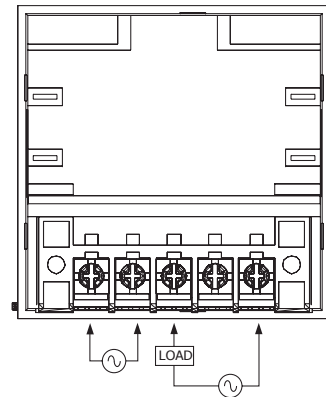


Time Switch and Load Power Supply are the Same

Surface Mount

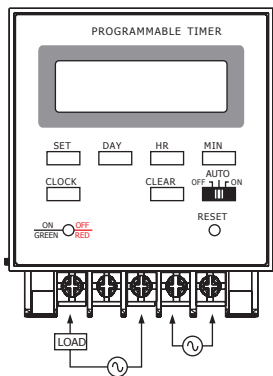

Flush Mount

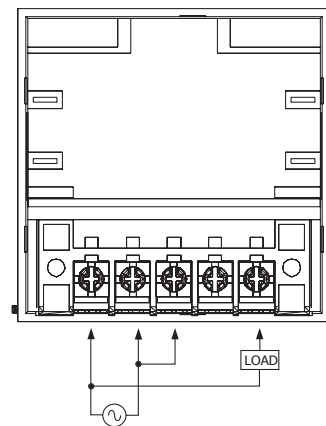

SKY TIMERS

83 Oxford West Drive, Oxford, Georgia 30054

Phone: (770) 788-9500 Fax: (770) 788-9555

www.skytimers.com

Ordering Information

STP-B-240

Voltage Range: 48 or 240
(see specifications above)

B — backlight
Nil — no options